





# A PROVEN AND INNOVATIVE MACHINE OFFER TO REDUCE THE CARBON FOOTPRINT OF YOUR PRODUCTS

## FEATURES

### Compact and modular equipment

An all-in-one shrink-sleeve mono material label for an optimized packaging

A dedicated, compact and modular equipment that meets industry standards and requirements, to implement NotiLight®: an adhesive-free, full body shrink-sleeve label, that integrates a multi-page leaflet, for an optimized all-in-one packaging.

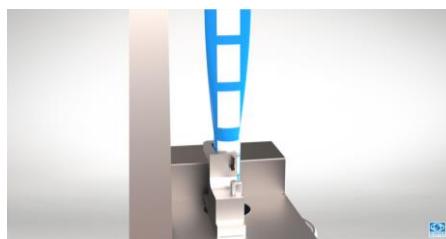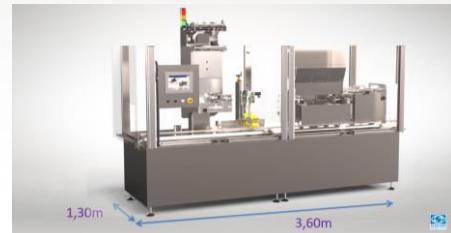

### Modular design adapted to a label with integrated leaflet

Dedicated module for an all-in-one shrink-sleeve label

This tooling is designed to meet the specifications of this shrink-sleeve product, which includes a label and a multi-page leaflet. It allows to follow the sleeve during all the stages of the application, while being adapted to the thickness of the notice.

### Dedicated sleeve unwinder unit

An operator-friendly shrink-sleeve unwinder unit

An unwinder unit designed to support larger mandrels, linked to reels incorporating the overhang of the leaflet. Located outside the machine, it offers easy access to the reels, positioned at man height, and the splicing table allows a fast and error-free operation. The whole system offers autonomy and is operator-friendly.



### Energy consumption tailored to each format

Energy management to reduce the carbon footprint of your products

This exclusive shrink technology combines several systems: the infrared technology adjustment, the height-adjustable tunnel and an exclusive diffusion system are adjusted to each product to optimize energy consumption.

## OPTIONS

### Shrink-sleeve orientation module



### Marking and serialization module



### Quality control module for excellence



### Exhaust hood for temperature control



# SPECIFICATIONS

Non contractual informations

## Machines

Conveyor height	980 +/- 50 mm
Speed	200 cpm
Cutting diameter	100 - 130 mm
Electrical consumption	80 kW/h




## Packaging

Packaging	Glass, Plastic, metal
Shapes	Cylindrical, square, complex shapes...
Product diameter	50 to 100 mm
Product height	50 to 200 mm

## Sleeves

Application	Full body with leaflet
Films	PET, rPET, OPS
Film thickness	40 to 50 microns

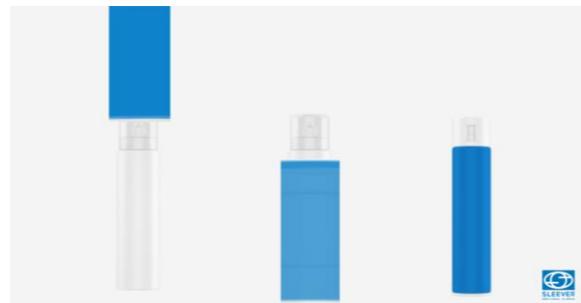

## MARKETS & PACKAGINGS



## Contact us



Europe  
North and south America  
Asia, China & Oceania  
Africa & Middle east



Corporate Office Sleever Machines Group  
ZI Le Val - 15 Avenue Arago  
91420 MORANGIS - FRANCE  
+ 33 (0)1 69 75 75 76 - machines@sleever.com

