



Multiflexshrink TE 80 - AI15




PROTECT AND SECURE SMALL COSMETICS, PERSONAL CARE AND BEAUTY PRODUCTS

FEATURES

A compact machine

A machine designed for an optimized workspace

An all-in-one concept that allows for the protection, security and traceability of unstable products with sophisticated shapes using a customized horizontal application technology. Everything has been done to guarantee the quality of the finish: a rotating system avoids any contact with the conveyor belt during the shrinking phase and the infrared shrink applicator is continuously moving to avoid altering the products. This ultra-compact machine, which is designed to operate both inline and offline, meets the needs of brands and full-service companies.

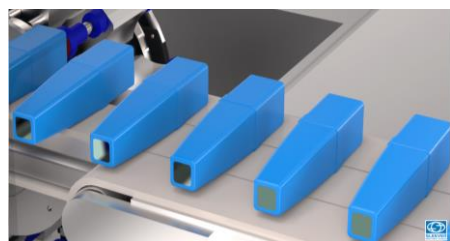

Full or partial protection


Provide protection and a tamper evident guarantee for unstable products

The evolution of market demands and the development of e-commerce require new partial or full protection features that ensure the product has not been opened before arriving with the consumer.

An ergonomic design for easy operation

Ergonomics and operator-friendly features for multi-product use

The machine has been designed to minimize downtime during format changes and increase performance. Alternative formats can be located in the machine's drawers for easy access and secure storage. Dedicated tools for each product shape allow for simple changes in minutes. Everything is in place to enable a quick and efficient restart of production, with settings stored in the menu of the console,

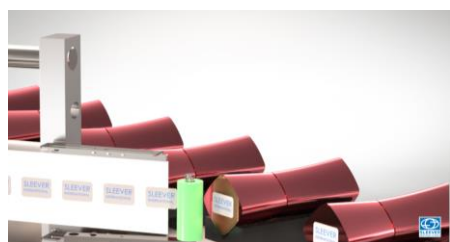

Late-stage differentiation differentiation (coding, labeling, serialization)

In-line marking technology for the ultimate customisation of your products

A technology that provides brands with the flexibility they need for late-stage differentiation such as labeling, reference coding and product serialization. All these elements allow for the desired level of finishing according to the expected level of information.

OPTIONS

Single or multiple reel holder



Automatic product loading module



Label application with orientation



Multifunction marking module



SPECIFICATIONS

* Non contractual information

Machine

Conveyor height	+/- 960 mm
Speed	80 to 120 bpm
Compressed air	6 bars
Electrical consumption	10 to 15 KW/h




Packaging

Materials	Glass, PET, PE, PP, metal
Shapes	Cylindrical, square, special
Products diameter	4 - 30 mm
Products length	65 - 150 mm
Sizes	3 - 100 ml




Sleeves

Applications	Protection, security, antitheft
Type of films	PET, RPET, OPS
Films thickness	30 - 60 microns
Finishing	Neutral, printed, ...

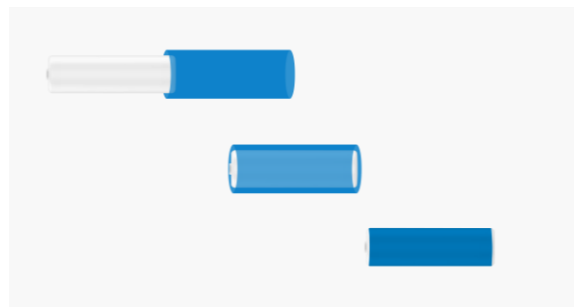

MARKETS & PACKAGINGS

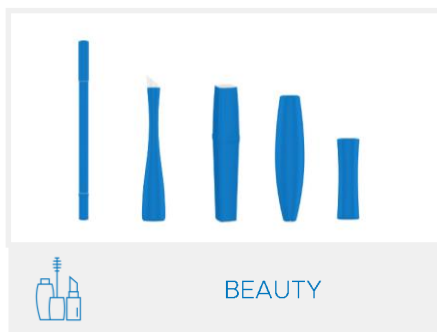

Contact Us



Europe and Eastern Europe
North & South America
Asia, China & Oceania
Africa & Middle East



Corporate Office Sleever Machines Group
ZI Le Val - 15 Avenue Arago
91420 MORANGIS - FRANCE
+ 33 (0)1 69 75 75 76 - machines@sleever.com

