



Combilab steam® FB60




FLEXIBILITY AND MOBILITY SERVING FULL-SURFACE SLEEVE APPLICATION

FEATURES

Compact and mobile machine

Mounted on wheels for quick and easy movement

An all-in-one concept : mobility, compact design, well-positioned control panel, and integrated electrical cabinet.

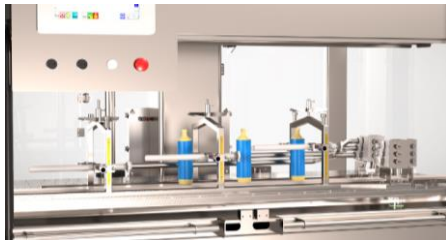

Adapts to each of your products for fast production start-up

A machine designed for the operator, simple to use

Dedicated tooling for each product format ensures operator comfort and controlled implementation, enabling quick restart in production.

Consistant quality control on the production line

Secure settings for perfect finishing control

A touchscreen interface allows the operator to manage and fine-tune settings throughout the production cycle.



Optimal finishing at controlled costs

High-quality finishing combined with efficient energy management


This equipment features a unique patented technology, equipped with a lifting system. Its shrink tunnel adjusts to each format. We recycle part of the energy and minimize overall consumption.

OPTIONS

Dual Tunnel



Ethernet Communication

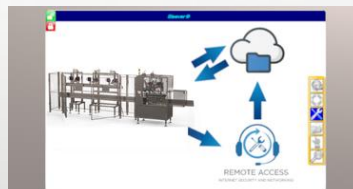

Tooling cart



SPECIFICATIONS

Non-contractual information

Machine

Conveyor height	980 mm +/- 50mm
Speed	60 bpm
Steam consumption	70 – 150 kg
Steam pressure	6 – 8 bars
Length	2300 mm



Packaging

Packaging	PEHD, PET, GLASS
Shapes	Cylindrical, Oval, Square
Capacity	From 100 ml to 2L
Product diameter	From 100 to 210 mm
Product Height	Up to 320 mm

Sleeves

Covering	Full body, multipack
Type of film	PET, GPET, RPET, POLYOLEFIN
Thickness	30 to 60 microns
Finion	Neutral, Printed



MARKETS & PACKAGING



Contact-us



Europe and East Europe
North and South America
Asia, China & Oceania
Africa & Middle East



Corporate Office Sleever Machines Group
ZI Le Val - 15 Avenue Arago
91420 MORANGIS - FRANCE
+ 33 (0)1 69 75 75 76 – www.sleever.com